


Gold Plated F-Type Female-to-Female Module

PRODUCT SPECIFICATION

Package includes:

A. Gold Plated F-Type Module, 1 pc

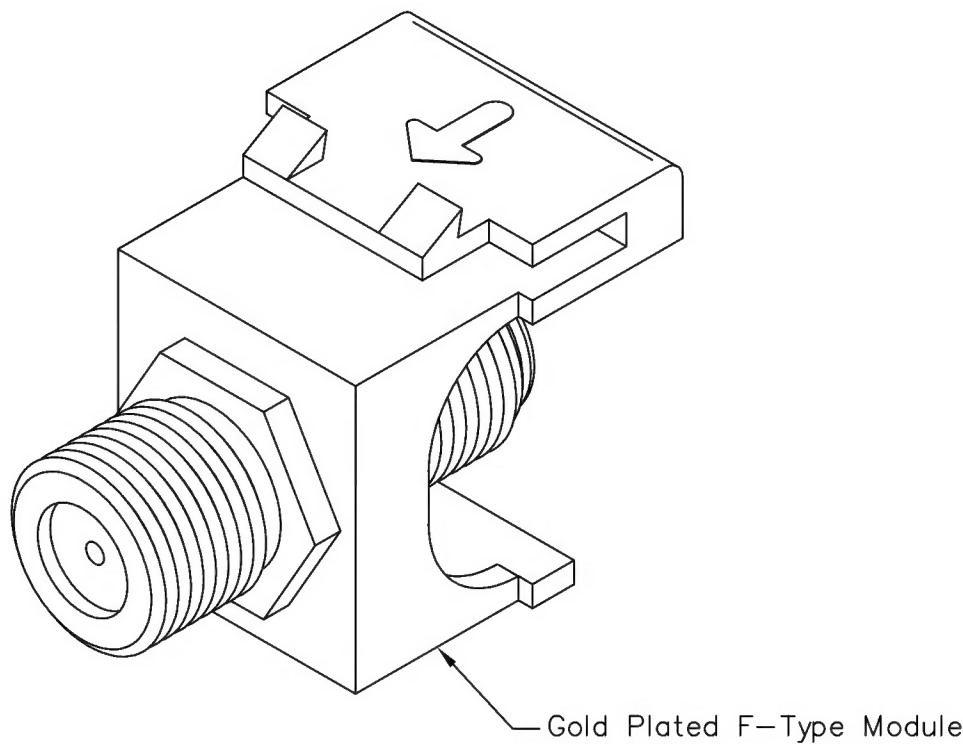


Features and Benefits:

- Gold plating for improved performance with superior signal quality with minimal noise
- Used for audio and video applications
- Rear threaded F-Type connectors for secure in-wall connections with both RG6 and RG59 coaxial cables
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Available in almond, black, gray, ivory, and white
- ANSI/TIA-568-C and UL 1863 compliant

| MODULE, F-TYPE, GOLD PLATED | | |  <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i> |
|-----------------------------|------------|----------|---|
| ITEM NO. | IC107B5GXX | REV. | D |
| DWG NO. | PS107B5G00 | PAGE NO. | 1 |

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

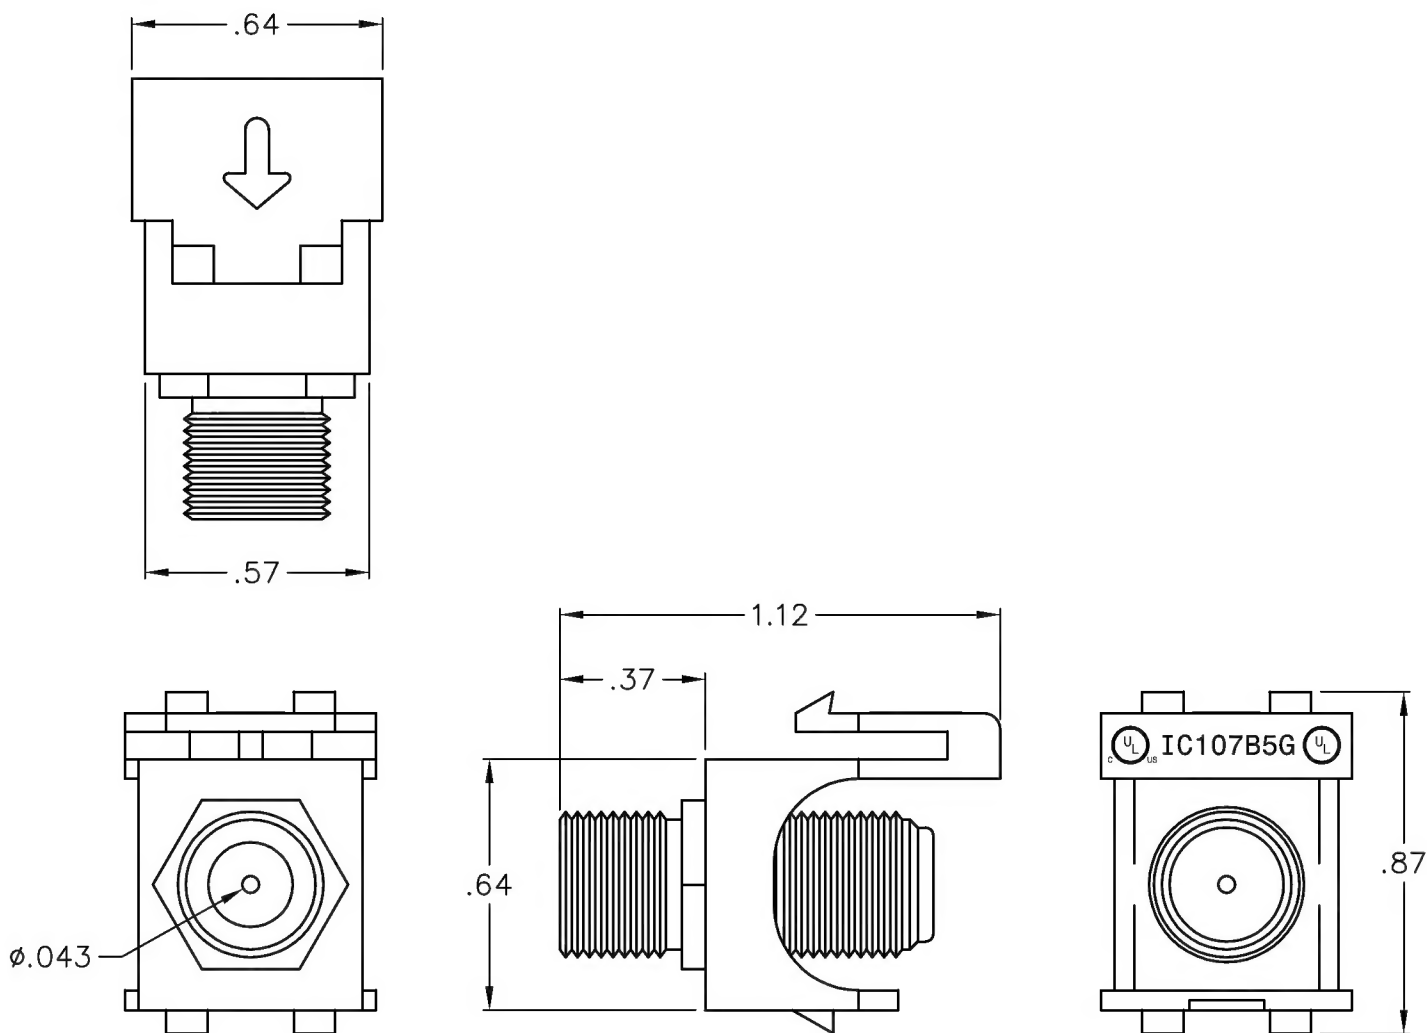

NOTE: UNLESS OTHERWISE SPECIFIED

1. HOUSING:

- A. MATERIAL: ABS, UL 94V-0
- B. COLOR: XX: AL-ALMOND, BK-BLACK, GY-GRAY, IV-IVORY, & WH-WHITE

2. GOLD PLATED F-TYPE CONNECTOR:

- A. MATERIAL: BRONZE WITH 3 MICRON GOLD PLATING
- B. INSULATOR COLOR: WHITE
- C. HOLDING FORCE > 80 GRAMS
- D. F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A

3. ELECTRICAL:

- A. RETURN LOSS OF -20 dB MAX
- B. INSULATION RESISTANCE > 5000 MOHM
- C. INSERTION LOSS < 0.3 dB

UL US FILE NO. 125268

MODULE, F-TYPE, GOLD PLATED

ITEM NO. IC107B5GXX

REV. D

DWG NO. PS107B5G00

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com